




Omaha Standard

EAGLE DUMP BODIES AND HEAVY DUTY CONTRACTOR BODIES

Omaha Standard's Eagle Dump Bodies and Heavy Duty Contractor Bodies combined with our low profile scissor or direct lift hoists are designed to help you get the most out of your truck.

Compare our features and you'll see why our body and hoist packages deliver superior performance, reliability and long-term value.

Omaha Standard...setting the industry's quality standards for over 80 years.

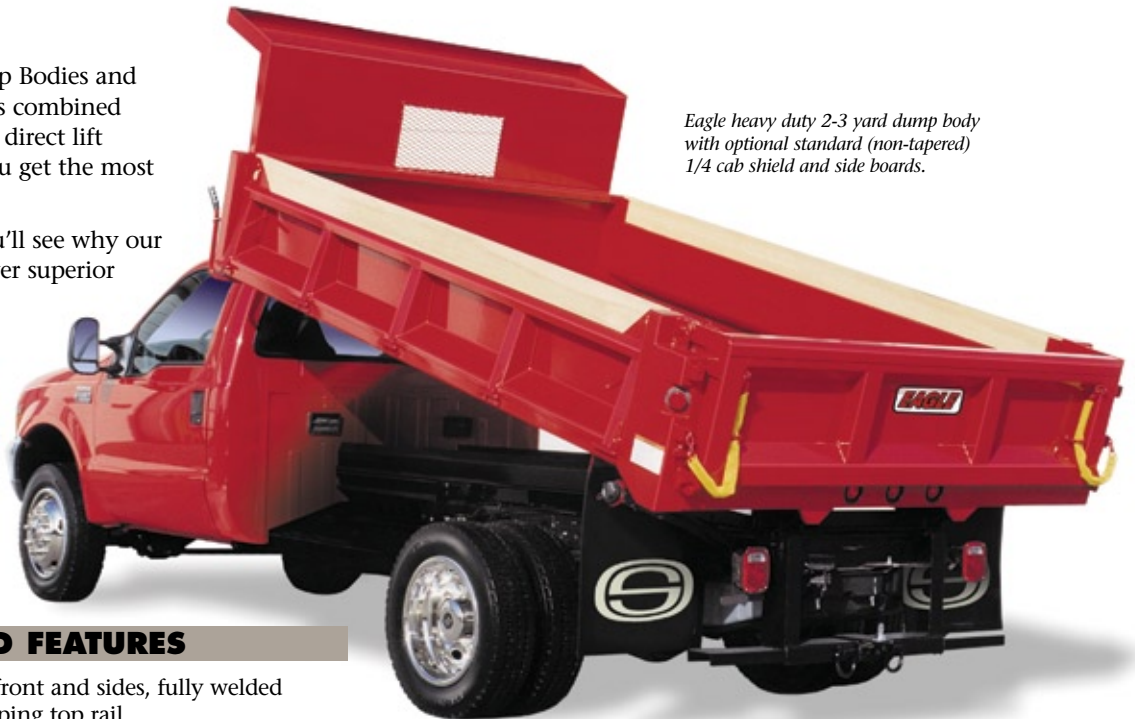

Eagle heavy duty 2-3 yard dump body with optional standard (non-tapered) 1/4 cab shield and side boards.

STANDARD FEATURES

- 10 gauge high strength steel front and sides, fully welded construction with formed sloping top rail
 - Front is fully welded to corner posts
 - Sides have continuously welded vertical supports
 - Sides available in 14" or 18" heights
- Note: Drop sides are standard on Heavy Duty Contractor Bodies only and are a popular option on both the Eagle and Super Eagle Dump Bodies*
- Brackets for 2" (nom.) sideboard extensions
 - End heights available are 20" or 24"
 - Clearance lights located high on rear corner posts and three light cluster (identification lights) located in rear apron are recessed and shock resistant rubber mounted
 - Fully boxed high strength steel construction tailgate with two vertical braces
 - 10 gauge high strength steel two-piece floor with 2" radiused corners
 - Substructure is constructed with 6" structural channel long members and 3" structural channel cross members on 15" centers (12" centers and 7" structural channel long members standard for Heavy Duty Contractor Bodies)

OPTIONS

- Cab shields available in 1/4 and 1/2 cab coverage and constructed of 10 gauge high strength steel (See back panel for cab shield specifications)
- Expanded metal window (12" x 24") in (non-tapered) cab shields
- Fold-down sides – one or both sides for Eagle and Super Eagle
- Fixed sides for Heavy Duty Contractor – one or both sides
- Boxed top rail
- Cross members on 15" centers

At Right: Optional tailgate with coal chute/patch gate. See other tailgate options inside.



America's Standard In Truck Bodies

HEAVY DUTY 2-3 YARD EAGLE DUMP BODIES



10 gauge high strength steel front and sides, fully welded construction and formed sloping top rail with brackets for sideboard extensions. Vertical box braces.

Shown with optional 1/2 cab shield and underbody toolbox. See back panel for cab shield specifications.

Preferred by more contractors, landscapers and other end users, the versatile 2-3 yard Eagle dump body is the most asked for-by-name dump body on the market.

Eagle dump bodies are available in 8', 9', 10' and 11' lengths with 14" sides and 20" ends.



Drop sides, either one or both sides, are an optional feature for the Eagle and Super Eagle.



Tailgate drops a full 180°. Adjustable chains allow for spreading or dropping the tailgate flush with the floor.

Extra heavy duty flame cut hardware.

Tailgate is operated from front of body with adjustable linkage.

OPTIONAL TAPERED CAB SHIELDS



Stylish tapered cab shield. Choose from 1/4 or 1/2 coverage. Constructed of high strength 10 gauge steel with a laser cut high visibility window.




See back panel for cab shield and bulkhead specifications.

Omaha Standard bodies and hoists are covered by a 3-year/36,000 mile limited warranty.

HEAVY DUTY 3-4 YARD SUPER EAGLE DUMP BODIES

Super Eagle dump bodies are available in 8', 9', 10' and 11' lengths with 18" sides and 24" ends.

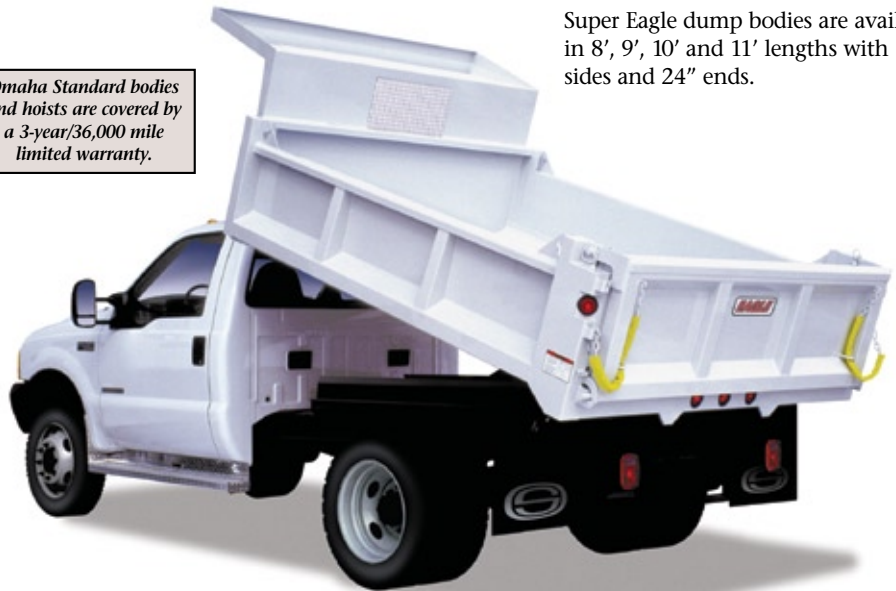

OPTIONAL TAILGATES

Quick Release Tailgate



Flush Mounted Tailgate



Coal Chute/Patch Gate



HEAVY DUTY DROP SIDE CONTRACTOR BODIES

Designed especially for the big jobs, this workhorse is the toughest contractor body on the road.

Available in 12', 14' and 16' lengths with drop sides as a standard feature, fixed sides are an option.

Your Omaha Standard distributor will help you put the right body and hoist package together for optimal performance and safety.



Two-piece drop sides with removable center post are standard on 14' and 16' models. 12' model has one-piece sides.



BODY AND HOIST SPECIFICATIONS

Omaha Standard offers 7 different models of quality built hoists with capacities from 5 tons to 14 tons, for bodies from 8 feet to 16 feet.

Critical hoist components are fabricated from special high-strength steel. Available with gear, piston or electric/hydraulic pumps.

All hydraulic systems operate at high pressure to maximize output. All cylinders are tested before installation and constructed with the highest quality components such as hard chrome piston rods to ensure long life.

A long lasting Omaha Standard hoist combined with an Omaha Standard body offer a total working unit superior to any on the market.



Omaha Standard bodies and hoists are covered by a 3-year/36,000 mile limited warranty.

In the interest of product improvement, Omaha Standard Inc. reserves the right to modify, change or revise design and specifications and furnish product so altered without prior notice.

MODEL NUMBER	LENGTH	SIDE HEIGHT	OUTSIDE WIDTH	C.A.	OVER HANG	CENTER OF AXLE TO CENTER OF HINGE	APPROX BODY WEIGHT	HOIST LIFT CAPACITY IN TONS (50° Dump Angle)					
								SUBFRAME and LOW PROFILE SCISSOR					
								415 (475 lbs)	515 (490 lbs)	519 (530 lbs)	520 (615 lbs)	625 (630 lbs)	630 (650 lbs)
DE081496	8'	14"	96"	60"	6"	33"	1,356	6.7	8.2	NA	NA	NA	NA
DE081896	8'	18"	96"	60"	6"	33"	1,435	6.7	8.2	NA	NA	NA	NA
DE091496	9'	14"	96"	60"	6"	45"	1,456	7.0	7.2	10.4	NA	NA	NA
DE091896	9'	18"	96"	60"	6"	45"	1,532	5.8	7.2	10.4	NA	NA	NA
DE111496	10'	14"	96"	84"	6"	33"	1,485	NA	NA	9.3	11.0	NA	NA
DE101896	10'	18"	96"	84"	6"	33"	1,578	NA	NA	9.3	11.0	NA	NA
DE111496	11'	14"	96"	84"	6"	45"	2,011	NA	NA	8.3	9.9	NA	NA
DE111896	11'	18"	96"	84"	6"	45"	2,165	NA	NA	8.3	9.9	NA	NA
DC121496	12'	14"	96"	84"	18"	45"	2,188	NA	NA	7.5	9.0	NA	NA
DC121896	12'	18"	96"	84"	18"	45"	2,380	NA	NA	7.5	9.0	NA	NA
DC141496	14'	14"	96"	108"	12"	45"	2,461	NA	NA	NA	NA	11.7	13.9
DC141896	14'	18"	96"	108"	12"	45"	2,630	NA	NA	NA	NA	11.7	13.9
DC161496	16'	14"	96"	138"	6"	45"	2,724	NA	NA	NA	NA	10.9	12.9
DC161896	16'	18"	96"	138"	6"	45"	2,920	NA	NA	NA	NA	10.9	12.9

NOTE: All lifting capacity ratings and gross load (body and cargo) are based on proper body overhang, mounting distance, level load and assume 3" clearance between front of body and back of cab with a rear hinge location of 33" (GM & Dodge) or 45" (Ford) behind center line of rear axle.

NOTE: Lifting capacity chart does not necessarily indicate recommended application.

Caution: The combined weights of the truck chassis, hoist, truck body, accessories and cargo must not exceed the gross vehicle weight rating (GVWR) of the truck.

NOTE: NA indicates that the application is not recommended. For hoist applications other than shown in above table, consult the factory.

CAB SHIELDS AND BULKHEADS

All cab shields are constructed from 10 gauge high strength steel.

Dump Body Tapered Cab Shields

The 21"/22" high cab shields have a 15" x 53" window standard and are for use with Eagle Dump Bodies and 14" high side Heavy Duty Contractor Bodies. The 16"/17" high cab shields have a 12" x 52" window standard and are for use with Super Eagle Dump Bodies and 19" high Heavy Duty Contractor Bodies.

Standard Cab Shield (Non-Tapered)

Available with optional 12" x 24" expanded metal window. For use with Eagle and Super Eagle Dump Bodies.

Heavy Duty Contractor Cab Shields

For use with Heavy Duty Contractor Body Bulkheads only.

Heavy Duty Contractor Body Bulkheads

All Heavy Duty Contractor Body Bulkheads have a standard 12" x 24" expanded metal window. Constructed with vertical reinforcing tubes for extra strength and durability. May be used with Eagle and Super Eagle Dump Bodies also.

TAPERED CAB SHIELDS					
MODEL	SHIELD COVERAGE	LENGTH	HEIGHT	WINDOW SIZE	APPROXIMATE WEIGHT
TS86-Q	1/4	18"	17"	12" X 52"	130 lbs.
T86-Q	1/4	18"	22"	15" X 53"	144 lbs.
TS86-H	1/2	27"	17"	12" X 52"	153 lbs.
T86-H	1/2	27"	22"	15" X 53"	167 lbs.
STANDARD CAB SHIELDS (Non-Tapered)					
S86-Q	1/4	18"	27"	None	171 lbs.
S86-QW	1/4	18"	27"	12" X 24"	162 lbs.
S86-H	1/2	27"	28"	None	191 lbs.
S86-HW	1/2	27"	28"	12" X 24"	182 lbs.
HEAVY DUTY CONTRACTOR CAB SHIELDS					
CSDC-Q	1/4	18"	12"	None	76 lbs.
CSDC-H	1/2	27"	12"	12" X 24"	103 lbs.
HEAVY DUTY CONTRACTOR BULKHEADS					
MODEL	WIDTH	HEIGHT TOTAL	HEIGHT-BULKHEAD	WEIGHT	
BHDC-42	86"	42"	23"	159 lbs.	
BHDC-50	86"	50"	31"	200 lbs.	
BHDC-58	86"	58"	39"	240 lbs.	

Ask about these other quality products from Omaha Standard

Service Bodies



"Badger" All Purpose Truck Bodies



The Omaha Standard quality equipment line includes e-coated service/utility bodies, platforms, stake bodies, dump bodies, contractor bodies, grain bodies and toolboxes. We also manufacture an outstanding line of low profile scissor and stabilized twin telescopic Olympic underbody hoists. Our equipment is sold and serviced by authorized Omaha Standard distributors who make it their business to see that you receive the finest equipment on the market and the best in installation and service.



Solid Stake Body



Super Duty Platform

Contractor Bodies



Heavy Duty Platforms



3501 South 11th Street ■ Council Bluffs, Iowa 51501 USA
 Phone 712-328-7444 ■ 800-279-2201 ■ FAX 800-568-7444
 www.omahastd.com ■ e-mail: os@omahastd.com

Sold and Serviced By:

In the interest of product improvement, Omaha Standard Inc. reserves the right to modify, change or revise design and specifications and furnish product so altered without prior notice.

EDHC 0806